



Rear View



Front View

RTI Control System



AMR-220

2 x 1 Audio Mixer Amplifier

The AMR-220 is a compact-sized Class-D digital mixer/amplifier for classroom or meeting room applications requiring switching of two audio sources (e.g., laptops, video conference systems). Additionally, a microphone can be mixed with the line-level audio sources. The adjustable balanced/unbalanced microphone input supports condenser, dynamic or wireless microphones.

A loop output can be used to share the same audio sources with multiple AMR-220s that power speakers in different audio zones. The AMR-220 offers various control options, including RS-232, as well as a convenient top control panel.


Key Features

- Two input, one output audio mixer/amplifier.
- Two analog audio inputs (switchable).
- Balanced/unbalanced adjustable microphone input with 48V phantom power for condenser, dynamic or wireless microphones.
- Supports microphone mixing to an audio line source.
- Built-in Class-D amplifier
- Power Output: 2 x 20 Watts (4 Ohms) or 1 x 40 Watts bridged (8 Ohms).
- EQ control (bass / treble).
- RS-232 control.
- Audio loop output to share audio sources with multiple amplifiers.
- Compact form factor with noiseless convection cooler.

Specifications

Power Supply+24 VDC
 Mounting.....Surface / wall mount
 Audio Input One Line Input Stereo (RCA jack)
 One Line Input Stereo (3.5 mm jack)
 Microphone Input..... One balanced/unbalanced (3-pin Phoenix Connector),
 Switchable Line / 48V Phantom Power
 Input Impedance.....>10K ohms
 Audio Output..... One Stereo Speaker Output (4-pin terminal block)
 One Loop Output (3.5 mm jack)
 Rated Output Power ... 2 x 20 Watts @ 4 Ohms / 1 x 40 Watts bridged @ 8 Ohms
 Speaker Impedance 4 to 8 Ohms
 Frequency Response..... 20Hz to 20KHz
 Bandwidth..... 20Hz to 25KHz
 Signal-to-Noise Ratio..... 80dB at maximum output

Channel Separation.....>75dB@20Hz to 20KHz
 Voltage Gain32dB
 CMRR.....>70dB@20Hz-20KHz
 Total Harmonic Distortion + Noise @1KHz 1% at nominal level
 Total Harmonic Distortion + Noise @20KHz 0.3% at nominal level
 Front Panel Control..... 5 Buttons for Input Select, Volume and EQ
 RS232 Control..... One, Bidirectional control (3-pin Phoenix Connector)
 Operating Temperature..... C -10 to +40 degrees F +14 to +104 degrees
 Operating Humidity.....5% to 95% Non-condensing
 Dimensions WxHxD..... 4.84" (123mm) x 1.55" (39.5mm) x 3.42" (87mm)
 Warranty Three Years (Parts & Labor)
 All features and specifications subject to change without notice

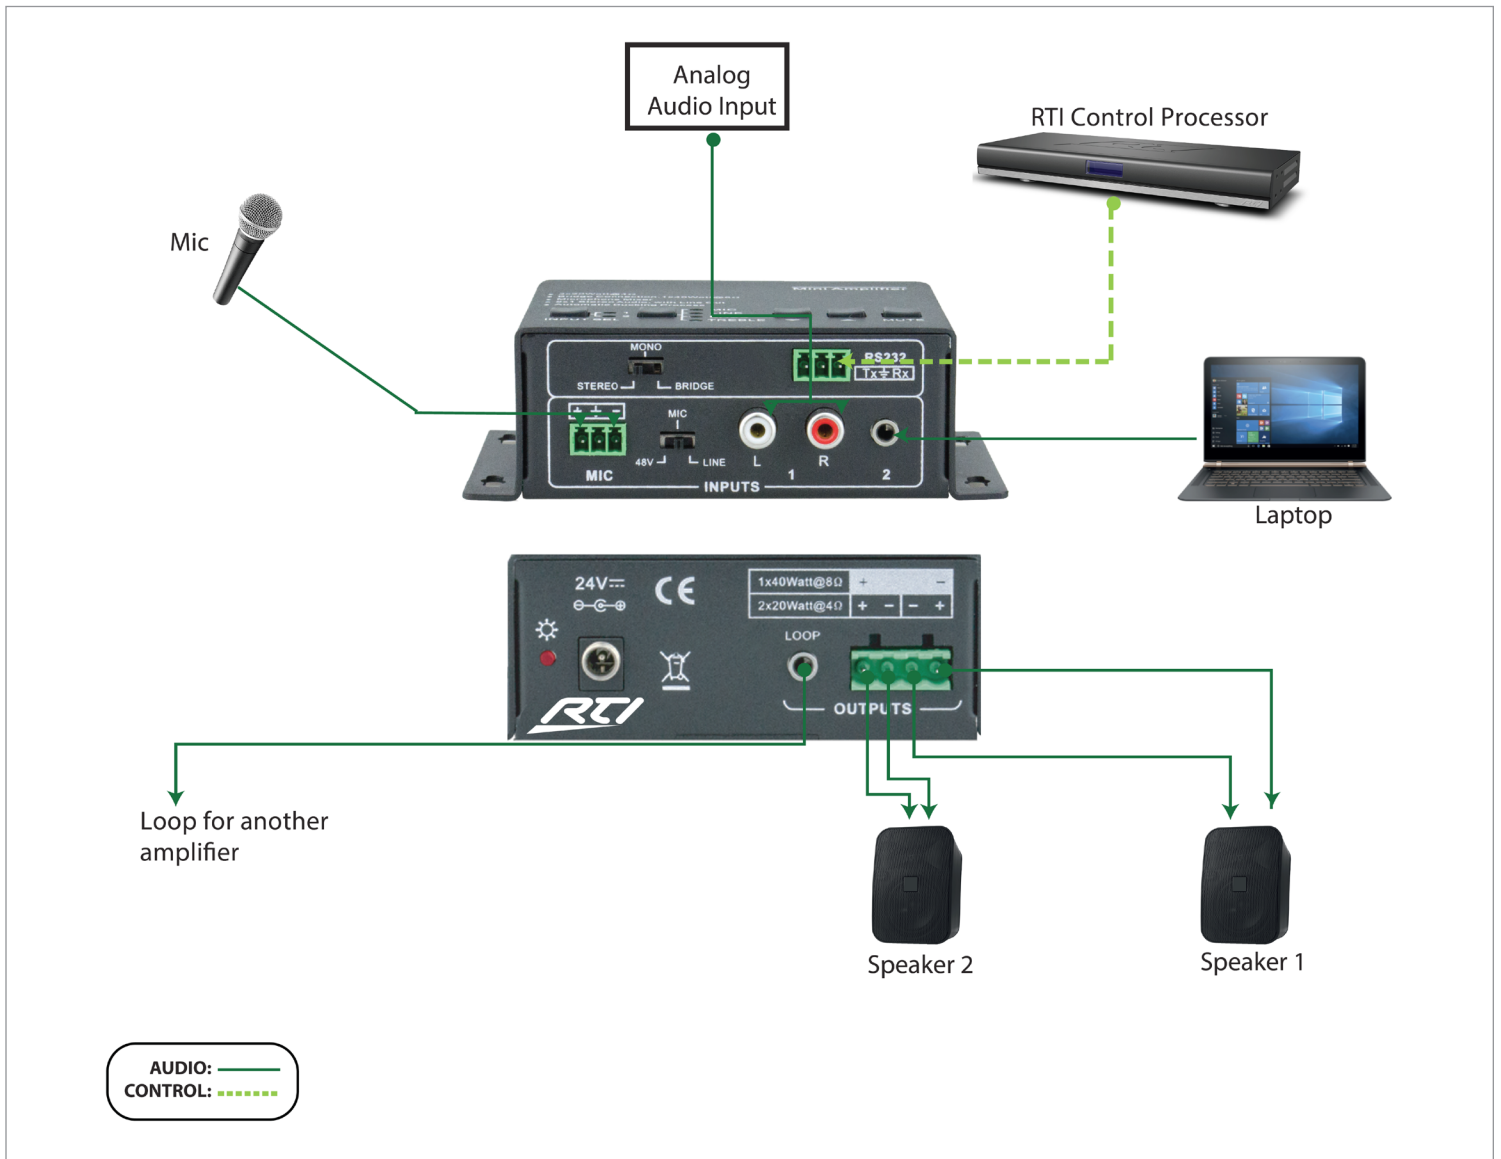

Remote Technologies Incorporated
 5775 12th Avenue East, Suite 180, Shakopee, MN 55379
 PH: (952) 253-3100 • Website: www.rticorp.com

RTI
 It's Under Control®